

SST™ GRAVITY CHUTES

If you're currently using steel or fiberglass chutes as part of your conveying system, you know environmental factors can cause packages to stick. Our innovative design solves many of the material flow problems associated with conventional chutes.

THE LOW FRICTION UHMW COEFFICIENT PROMOTES SEAMLESS PACKAGE FLOW AND ALLOWS DAMP PACKAGES TO MAINTAIN SPEED


MULTIPLE TYPES OF UHMW MATERIALS ARE AVAILABLE TO SUPPORT SPECIFIC PACKAGE SIZES AND WEIGHTS

UHMW FDA APPROVED MATERIAL IS AVAILABLE

ALLOWS SELF STARTING AT ANGLES LESS THAN COMMON STEEL CHUTES

FULLY CUSTOMIZABLE - WITH FEW RESTRICTIONS ON WIDTH, SIDE GUARD, OR PITCH

SST™ GRAVITY CHUTES ARE DELIVERED ASSEMBLED AND READY FOR INSTALLATION

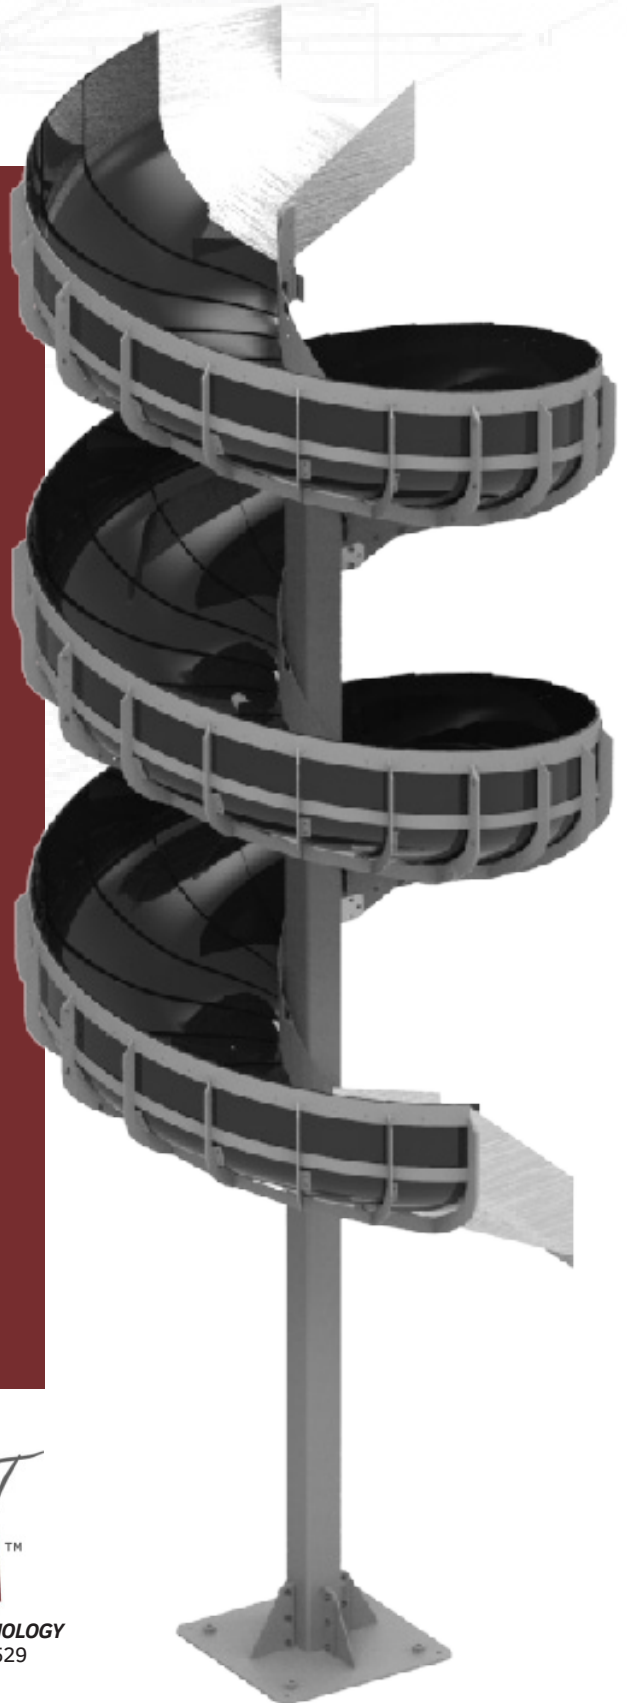


*Manufacturing Quality
Metal Products
Since 1903*



SLICK SURFACE TECHNOLOGY
U.S. Patent #8733529

ENTRY/EXIT CONFIGURATIONS

RIGHT DECLINE (CLOCKWISE)

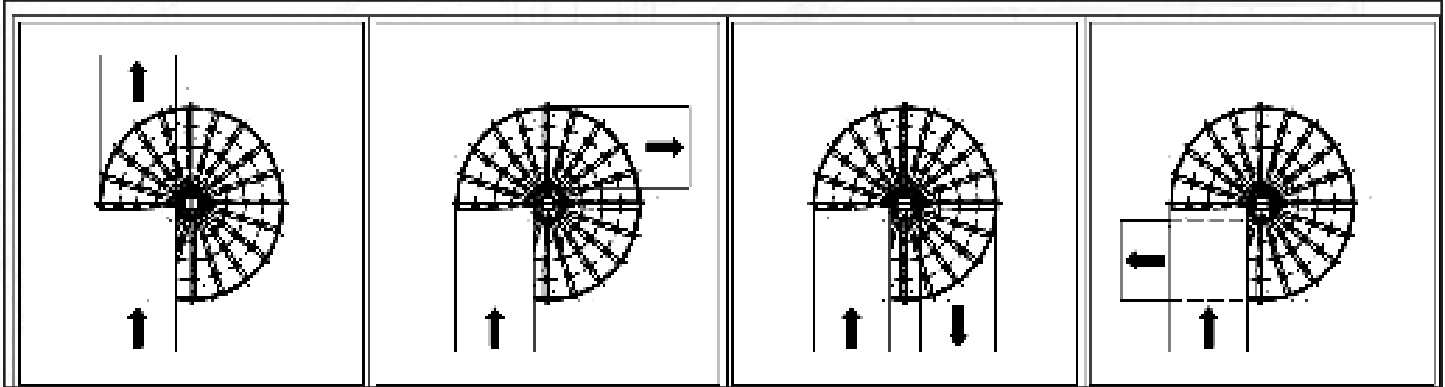


C-1

C-2

C-3

C-4

LEFT DECLINE (COUNTER-CLOCKWISE)

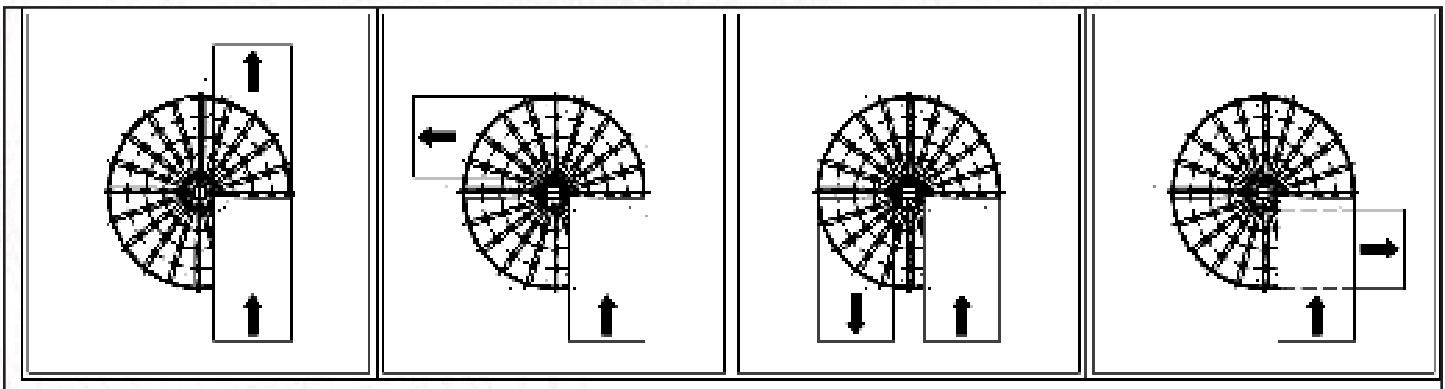

CC-1

CC-2

CC-3

CC-4



TIFFIN METAL PRODUCTS COMPANY™

450 Wall Street · Tiffin, Ohio 44883
800-537-0983 · www.tiffinmetal.com

